


■ 性能比较


耐久性比较

测试条件: 使用230mm 锥形砂轮片在地面打磨金属板

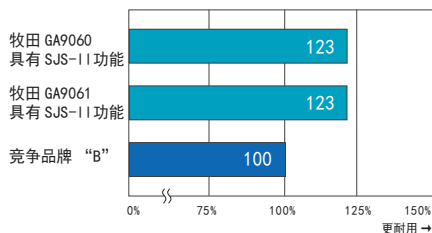


工作效率比较

测试条件: 使用230mm 锥形砂轮片在地面打磨金属板

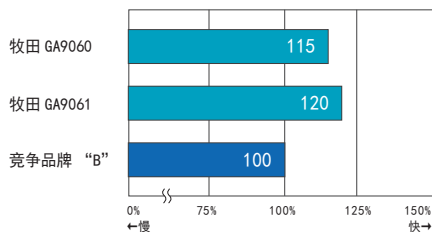

打磨金属时工具的振动比较

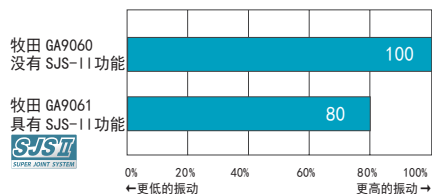

■ 选配件



角向磨光机	GA7060, GA7060R, GA7061, GA7061R	180mm (7")	218																												
双重绝缘 缓速启动 (GA7060R, GA7061R)	SJS-II 超级离合系统 GA7061, GA7061R	<table> <tr> <td>GA7060</td><td>GA7060R</td><td>GA7061</td><td>GA7061R</td></tr> <tr> <td>额定输入功率</td><td>2,200W</td><td>2,200W</td><td>2,200W</td></tr> <tr> <td>砂轮直径</td><td>180mm (7")</td><td>180mm (7")</td><td>180mm (7")</td></tr> <tr> <td>回转数 (rpm)</td><td>8,500</td><td>8,500</td><td>8,500</td></tr> <tr> <td>体积 (长x宽x高)</td><td>450x200x144mm (17-3/4"x7-7/8"x5-5/8")</td><td>450x200x144mm (17-3/4"x7-7/8"x5-5/8")</td><td>450x200x145mm (17-3/4"x7-7/8"x5-3/4")</td></tr> <tr> <td>净重</td><td>5.3kg (11.7lbs)</td><td>5.4kg (11.9lbs)</td><td>5.5kg (12.1lbs)</td></tr> <tr> <td>电源线</td><td>2.5m (8.2ft)</td><td>2.5m (8.2ft)</td><td>2.5m (8.2ft)</td></tr> </table>	GA7060	GA7060R	GA7061	GA7061R	额定输入功率	2,200W	2,200W	2,200W	砂轮直径	180mm (7")	180mm (7")	180mm (7")	回转数 (rpm)	8,500	8,500	8,500	体积 (长x宽x高)	450x200x144mm (17-3/4"x7-7/8"x5-5/8")	450x200x144mm (17-3/4"x7-7/8"x5-5/8")	450x200x145mm (17-3/4"x7-7/8"x5-3/4")	净重	5.3kg (11.7lbs)	5.4kg (11.9lbs)	5.5kg (12.1lbs)	电源线	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	标准附件: 侧柄, 锁定螺母扳手 (随机不包含砂轮片)
GA7060	GA7060R	GA7061	GA7061R																												
额定输入功率	2,200W	2,200W	2,200W																												
砂轮直径	180mm (7")	180mm (7")	180mm (7")																												
回转数 (rpm)	8,500	8,500	8,500																												
体积 (长x宽x高)	450x200x144mm (17-3/4"x7-7/8"x5-5/8")	450x200x144mm (17-3/4"x7-7/8"x5-5/8")	450x200x145mm (17-3/4"x7-7/8"x5-3/4")																												
净重	5.3kg (11.7lbs)	5.4kg (11.9lbs)	5.5kg (12.1lbs)																												
电源线	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)																												
角向磨光机	GA9060, GA9060R, GA9061, GA9061R	230mm (9")	218																												
双重绝缘 缓速启动 (GA9060R, GA9061R)	SJS-II 超级离合系统 GA9061, GA9061R	<table> <tr> <td>GA9060</td><td>GA9060R</td><td>GA9061</td><td>GA9061R</td></tr> <tr> <td>额定输入功率</td><td>2,200W</td><td>2,200W</td><td>2,200W</td></tr> <tr> <td>砂轮直径</td><td>230mm (9")</td><td>230mm (9")</td><td>230mm (9")</td></tr> <tr> <td>回转数 (rpm)</td><td>6,600</td><td>6,600</td><td>6,600</td></tr> <tr> <td>体积 (长x宽x高)</td><td>450x250x144mm (17-3/4"x9-7/8"x5-5/8")</td><td>450x250x144mm (17-3/4"x9-7/8"x5-5/8")</td><td>450x250x145mm (17-3/4"x9-7/8"x5-3/4")</td></tr> <tr> <td>净重</td><td>5.5kg (12.1lbs)</td><td>5.6kg (12.4lbs)</td><td>5.7kg (12.6lbs)</td></tr> <tr> <td>电源线</td><td>2.5m (8.2ft)</td><td>2.5m (8.2ft)</td><td>2.5m (8.2ft)</td></tr> </table>	GA9060	GA9060R	GA9061	GA9061R	额定输入功率	2,200W	2,200W	2,200W	砂轮直径	230mm (9")	230mm (9")	230mm (9")	回转数 (rpm)	6,600	6,600	6,600	体积 (长x宽x高)	450x250x144mm (17-3/4"x9-7/8"x5-5/8")	450x250x144mm (17-3/4"x9-7/8"x5-5/8")	450x250x145mm (17-3/4"x9-7/8"x5-3/4")	净重	5.5kg (12.1lbs)	5.6kg (12.4lbs)	5.7kg (12.6lbs)	电源线	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	标准附件: 侧柄, 锁定螺母扳手 (随机不包含砂轮片)
GA9060	GA9060R	GA9061	GA9061R																												
额定输入功率	2,200W	2,200W	2,200W																												
砂轮直径	230mm (9")	230mm (9")	230mm (9")																												
回转数 (rpm)	6,600	6,600	6,600																												
体积 (长x宽x高)	450x250x144mm (17-3/4"x9-7/8"x5-5/8")	450x250x144mm (17-3/4"x9-7/8"x5-5/8")	450x250x145mm (17-3/4"x9-7/8"x5-3/4")																												
净重	5.5kg (12.1lbs)	5.6kg (12.4lbs)	5.7kg (12.6lbs)																												
电源线	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)																												

规格和设计如有变更, 恕不另行通知



牧田 (中国) 有限公司

http://www.makita.com.cn



微信公众号



角向磨光机产品系列

重型应用角磨机

照片 : GA9060

照片 : GA7060



GA7061, GA7061R, GA9061, GA9061R

连续额定输入功率

2,200W

180mm (7")

GA7060, GA7060R,
GA7061, GA7061R

230mm (9")

GA9060, GA9060R,
GA9061, GA9061R

重型作业，更加耐用！

转子的防护




长寿命

换向器片的厚度由1.2mm 增加到了1.9mm，同时保持换向器片的质量（同以往型号相比）



加强的电机机壳

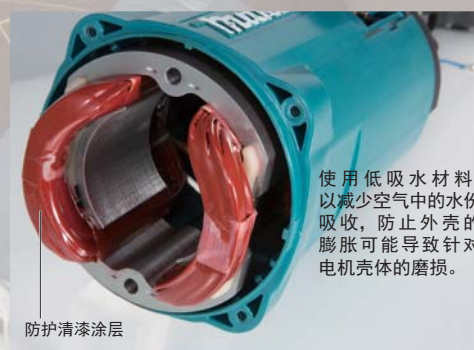

新设计的碳刷握




基本的弹簧更改为螺旋弹簧保持小巧的机身，同时增加碳刷的工作长度

紧凑的机身尺寸



长寿命碳刷

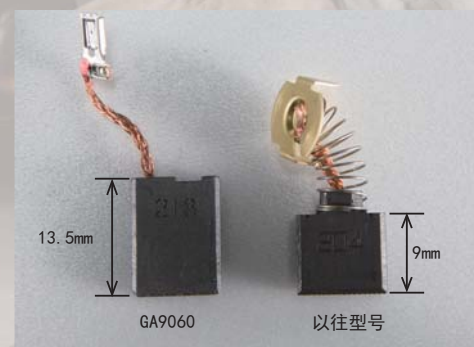

开关盖板和海绵片



防止因金属粉尘的进入而造成开关端子间的短路

全新设计的轴锁



从倾斜的角度按下轴锁，即使戴着手套也能便捷的操作

防意外启动功能

(GA7060R, GA9060R, GA7061R, GA9061R)

- 防意外启动，即使工具开关处于开启状态，并且插上电源，工具也不会被启动
- LED指示灯闪烁，表示防意外启动功能被激活

缓速启动

(GA7060R, GA9060R, GA7061R, GA9061R)

最大限度地减少启动时的冲击力，并使得工具舒适启动

	型号	净重	SJS II	防意外启动功能	缓速启动
180mm (7")	GA7060	5.3 kg (11.7 lbs)			
	GA7060R	5.4 kg (11.9 lbs)		✓	✓
	GA7061	5.5 kg (12.1 lbs)	✓		
	GA7061R	5.5 kg (12.1 lbs)	✓	✓	✓
240mm (9")	GA9060	5.5 kg (12.1 lbs)			
	GA9060R	5.6 kg (12.4 lbs)		✓	✓
	GA9061	5.7 kg (12.6 lbs)	✓		
	GA9061R	5.7 kg (12.6 lbs)	✓	✓	✓